


### Features THT-Metal

- Wide frequency range
- Low cost to performance
- Excellent for clock frequency generation
- Very low profile available




### HC49US

#### Specification



Type	HC49US	ESR max.
Frequency Range fundamental	3,579 MHz ~ 35,000 MHz (AT cut)	3,579MHz ~ 4,5MHz = 150 Ohm
Frequency Range over tone	30,000 MHz ~ 90,000 MHz (AT cut)	4,6MHz ~ 6,0MHz = 90 Ohm
Frequency Tol. at 25°C±5°C	stand. ±30ppm; available ±5ppm ~ ±50ppm	6,1MHz ~ 8,0MHz = 70 Ohm
Temperature Range	0°C ~ +70°C, or order code	8.1MHz ~ 12,0 MHz = 60 Ohm
Load Capacitance CL	standard 16pF; available 5pF ~ 50pF	12,1MHz ~ 15,0MHz = 40 Ohm
Shunt Capacitance C0	7pF max.	15,1MHz ~ 18,0MHz = 30 Ohm
Aging	±5ppm/year max.	18,1MHz ~ 40,0MHz = 25 Ohm
Storage Temperature	-40°C - +85°C	Temp. Tolerance at 25°C± 5°C (ppm)
Drive Level	100µW typ.	-20°C ~ +70°C standard ±30 available ±10 ~ ±50
RoHS	compliant	-40°C ~ +85°C standard ±50 available ±10 ~ ±50
Contents Of Reel	1000 pcs	-40°C ~ +125°C available ±70 ~ ±150

#### Drawing (mm)

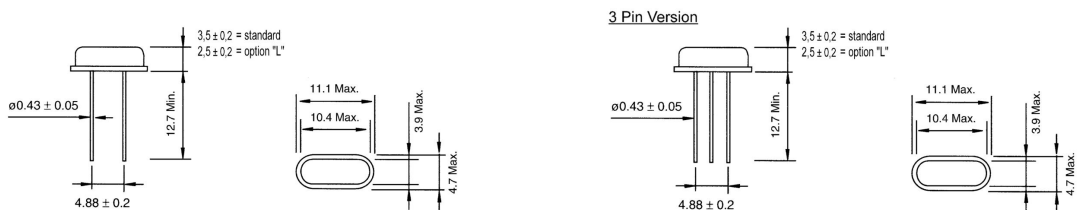

#### Tape dimensions (mm)

#### Soldering profile

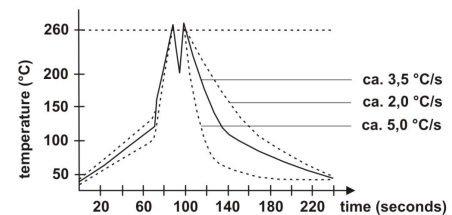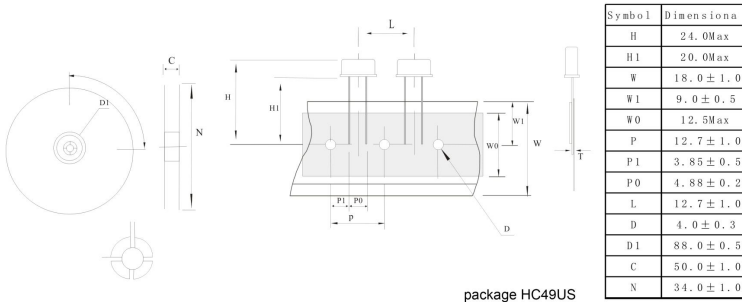

#### Order code

Q	- 10.00000M	- HC49US	- F	- 30	- 30	- D	- 32	- I
Part	Frequency	Package	Mode of oscillation	Frequency tolerance	Temperature tolerance	Temperature range	Load capacitance	Option
Q=Quartz	M=MHz	HC49US	F=fund. 3=3.OT	±ppm (25°C)	±ppm (Temp. range)	A= 0°C ~ +70°C B= -10°C ~ +60°C C= -10°C ~ +70°C D= -20°C ~ +70°C E= -40°C ~ +85°C F= -40°C ~ +105°C G= -40°C ~ +125°C	pF SR=series	3P=3Pin version L=Low height TR=Taped reeled I=Isolation washers X=Special options